

CVS Console



IP 55 (IEC 529)



- **Material**
 - Body - 1.4mm mild steel.
 - Door, gland plate & mounting plate - 2.0mm mild steel.
 - Plinth - 2.0/3.0mm mild steel.
- **Finishing**
 - Body & Door - Polyester powder coated (RAL 7035 - grey).
 - Mounting plate - Rainbow plated.
 - Plinth - Polyester powder coated (RAL 5004 - black).

- A continuous seal of polyurethane gasket at door provides IP protection.
- Earthing facilities on door, body and mounting plate.
- Complete with mounting plate (adjustable in depth).
- Complete with die cast quarter turn lock.




IP 55



CVS Console

Model and Dimension

NO.	MODEL			DIMENSION (mm)			NOS. OF FRONT DOOR
	CONSOLE	PLINTH (100H)	PLINTH (200H)	CONSOLE (H x W x D)	MOUNTING PLATE (H x W)	GLAND HOLE (W x D)	
1	CS600	PL64/100	PL64/200	1000 x 600 x 500	827 x 516	360 x 180 x 1 no.	1
2	CS800	PL84/100	PL84/200	1000 x 800 x 500	827 x 716	540 x 180 x 1 no.	1
3	CS1000	PL104/100	PL104/200	1000 x 1000 x 500	827 x 916	690 x 180 x 1 no.	2
4	CS1200	PL124/100	PL124/200	1000 x 1200 x 500	827 x 1116	360 x 180 x 2 nos.	2

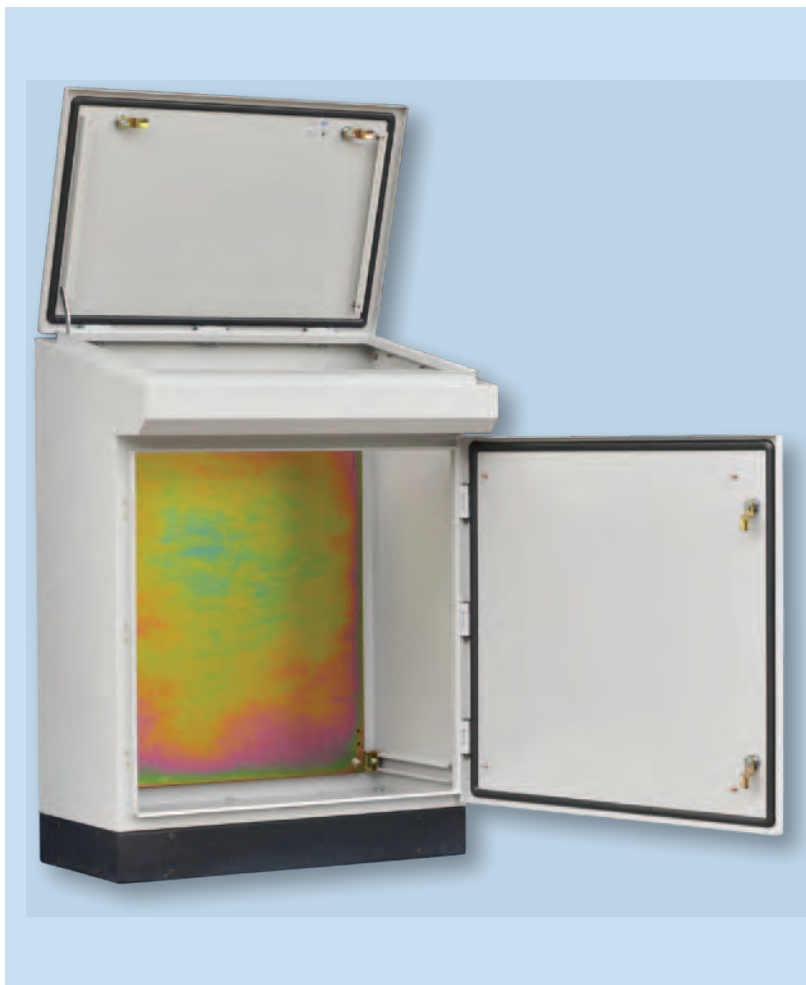

* Full internal view



* Top internal view



* Bottom internal view

Manufacturer:-
CVS METAL INDUSTRIES SDN. BHD. (173532A)
No. 1, Jalan BK 1/14, Bandar Kinrara,
47180, Puchong, Selangor, Malaysia.
Tel: 603-8070 5279/1960 Fax: 603-8070 3920
Website: www.cvs.com.my ;
www.cvsenclosure.com
E-mail: office@cvs.com.my



Product design and specification may change without prior notice.



CERT NO : KLR 0403479



SIRIM
Certified to: MS IEC 60529: 2005
Certification No.: LC020801